


# MediaMaster™ Video On Demand System

## Tilting Wall Bracket for Digital Signage Displays

MM-1729-TWB

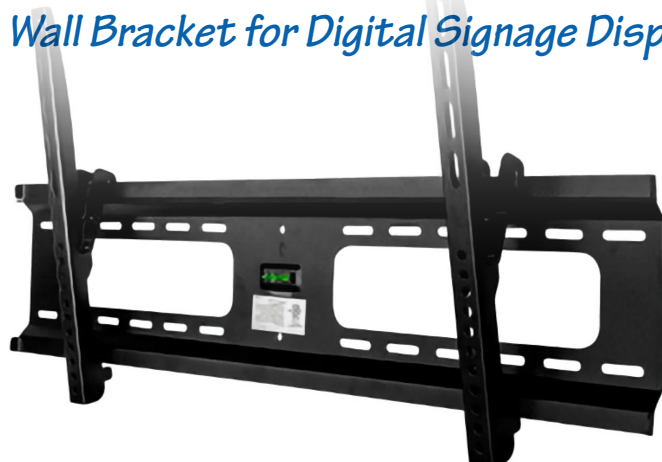

### Common Specifications

Min. VESA: 200 × 200

Depth: 1.8"

Tilt Range: +0°/-10°

### Mounting Recommendations

**Solid Poured Concrete Walls:** Drill a minimum of six 5/16" holes using SDS bits. Install Toggler brand Alligator Solid Wall Anchors with #12 × 1.75" hex head screws and fender washers. Alternately, drill a minimum of six 1/4" holes using SDS bits, and install 1/4" × 1.75" Wej-It brand Ankr Tite Wedge Anchors with fender washers.

**Masonry Block Walls:** Drill a minimum of six 5/16" holes using SDS bits, install Toggler brand Alligator Solid Wall Anchors with #12 × 2" hex head screws and fender washers. Alternately, pre-drill a minimum of six holes using SDS bits provided by the manufacturer, and install 2" Wej-It brand Hex Head Concrete Screws.

**Drywall Screwed to Metal Studs:** Drill a minimum of six 1/2" holes through the center of three metal studs and fasten the backplate via minimum of six 1/4" Snaptoggle brand Heavy Duty Toggle Bolts with fender washers. Spring wing type toggle bolts are not permitted.

### Size & Weight Options

The bracket is available in a number of size and weight classes:

	65L	75L	86L	65H	75H	86H
Min Diag	37"	40"	46"	37"	40"	46"
Max Diag	65"	75"	86"	65"	75"	86"
Max Lbs	100	200	200	350	350	350
Max VESA	800×400	800×400	800×400	900×600	900×600	900×600

### Features

- Mounts to any type of flat wall
- Includes built-in level
- Steel construction
- Mounting hardware is included
- UL 2442 compliant
- RoHS compliant



**MEDIAMASTER.COM, INC.**

1 Las Olas Circle • Unit 601 • Ft. Lauderdale, FL 33316  
tel 631.589.4300 • fax 631.589.4311 • www.mediamaster.com

Revised 2023.09.07